


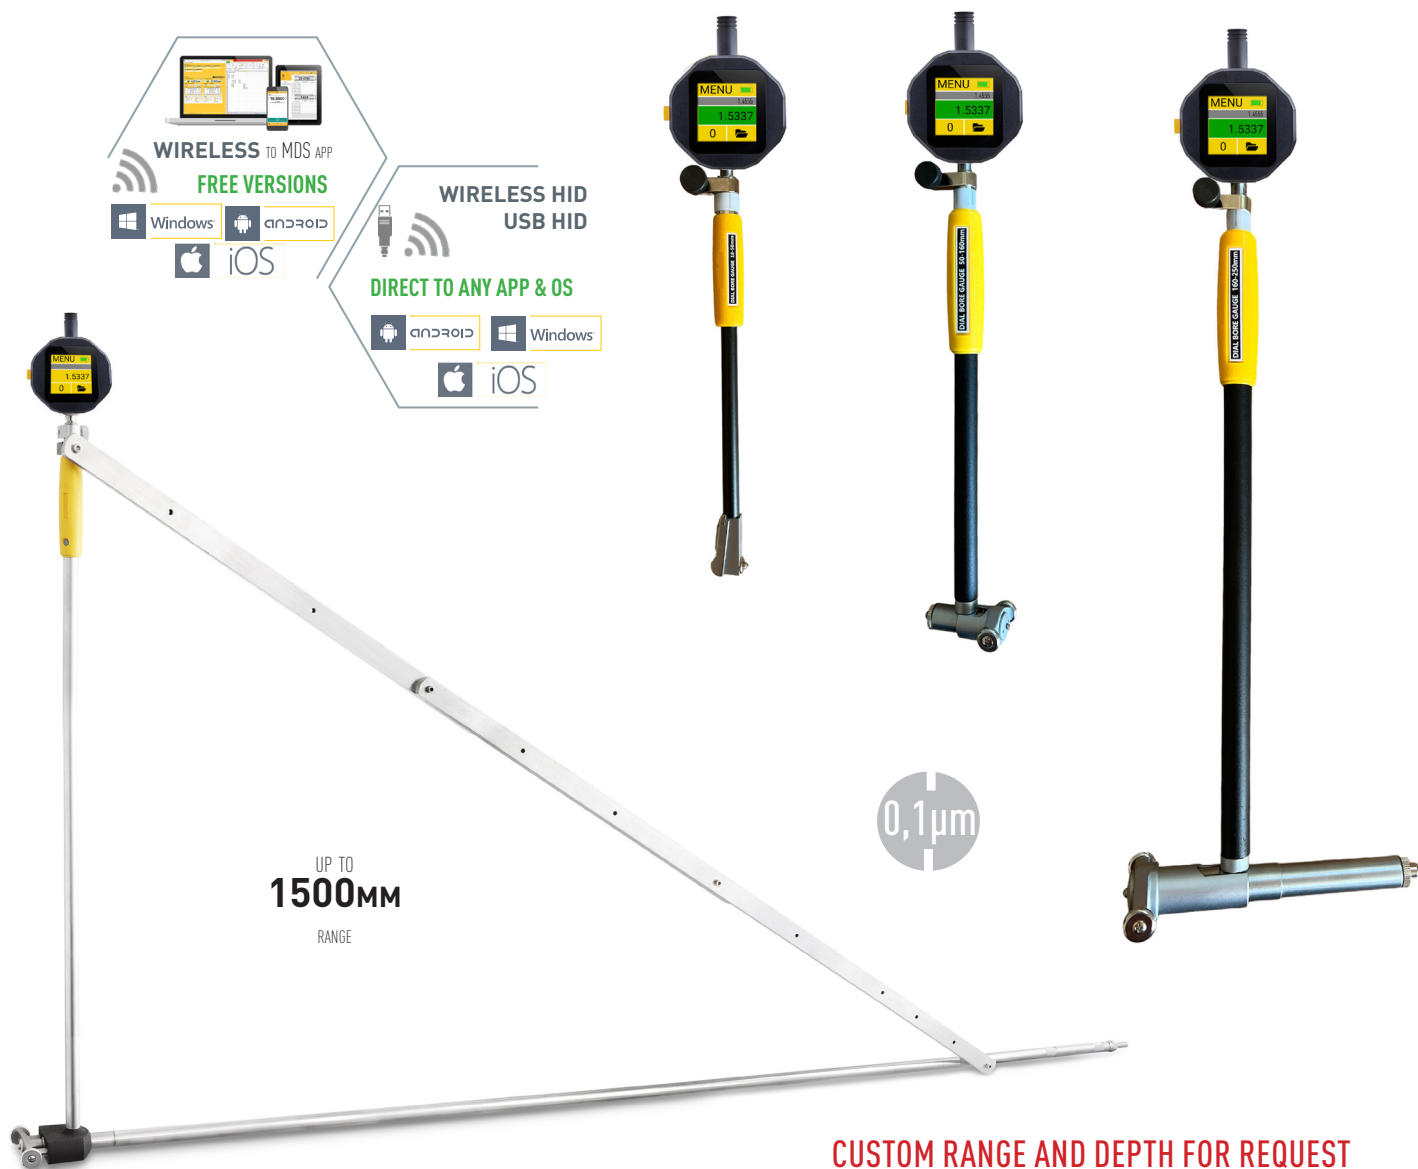

CUSTOM RANGE AND DEPTH FOR REQUEST

COMPUTERIZED MICS SYSTEM MAIN FUNCTIONS

COLOR GO / NOGO	COLOR MAX / MIN / RANGE	TIMER	Formula
MEMORY 1000 values	MEMORY STATISTICS	TEMPERATURE COMPENSATION	DEVICE INFO, UPDATE
DISPLAY & ENERGY	RESOLUTION, mm/inch	WIRELESS to MDS app	WIRELESS & USB HID

- Two-point dial bore gauges with range up to 1500mm and depth up to 2 m
- Carbide tipped measuring pins
- **Functions:** Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction, Resolution selecting, Connection status
- **Memory manager:** 2000 values, Folders system, Statistics mode, Memory data transfer
- **Quick reading system** (50 value/sec)
- **4 MODES DATA TRANSFER:** WIRELESS to MDS app (Windows, Android, iOS, MacOS); WIRELESS HID, WIRELESS HID+MAC, USB HID
- **Calibration** certificate included (ISO17025 (Ilac MRA))

Item No	Range	Depth	Resolu- tion	Accu- racy	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	FW update	Recharge	Memory	WIRELESS	USB				
	mm	mm	mm	µm																	
132010700	6-10	60	0.0001	±3	•	•	•	•	•	•	•	•	•	•	Folders / 2000 val	Long range / HID	USB HID / Update firmware				
132018700	10-18	110		±3	•	•	•	•	•	•	•	•	•	•							
132050700	18-50	130		±3	•	•	•	•	•	•	•	•	•	•							
132050711		500		±3	•	•	•	•	•	•	•	•	•	•							
132050722		1000		±3	•	•	•	•	•	•	•	•	•	•							
132050744		2000		±3	•	•	•	•	•	•	•	•	•	•							
132160700	50-160	150		±3	•	•	•	•	•	•	•	•	•	•							
132160711		500		±3	•	•	•	•	•	•	•	•	•	•							
132160722		1000		±3	•	•	•	•	•	•	•	•	•	•							
132160744		2000		±3	•	•	•	•	•	•	•	•	•	•							
132250700	160-250	260		±5	•	•	•	•	•	•	•	•	•	•							
132250722		1000		±5	•	•	•	•	•	•	•	•	•	•							
132250744		2000		±5	•	•	•	•	•	•	•	•	•	•							
132450700	250-450	260		±8	•	•	•	•	•	•	•	•	•	•							
132450722		1000		±8	•	•	•	•	•	•	•	•	•	•							
132450744		2000		±8	•	•	•	•	•	•	•	•	•	•							
132900700	400-1000	440		±12	•	•	•	•	•	•	•	•	•	•							
132900722		1000		±12	•	•	•	•	•	•	•	•	•	•							
132900744		2000		±12	•	•	•	•	•	•	•	•	•	•							
132951700	130-1500	440		±8	•	•	•	•	•	•	•	•	•	•							
BORE GAUGES SETS																					
132160705	18-160		0.0001	±3	•	•	•	•	•	•	•	•	•	•	•	•	•				
132450705	18-450			±8	•	•	•	•	•	•	•	•	•	•	•	•	•				
132990705	6-1000			±12	•	•	•	•	•	•	•	•	•	•	•	•	•				

COMPLECTATION

FREE VERSIONS OF MDS APP

USB DATA/CHARGING CABLE

CALIBRATION PROTOCOL

DOWNLOAD APP



OPTIONAL

IoT DATA BUTTON

MDS SOFTWARE

IoT DISPLAY UNIT

UNIVERSAL CALIBRATION STANDS