



- Retractable construction of measuring part for block bores, grooves and recesses
- For the determination of internal diameters, where a smaller bore lying in front of this diameter, has to be passed
- Patents UA147920, UA150454, UA99686
- Digital MICRON indicator with PRESET, HOLD functions and optional USB data transfer
- Calibration certificate included (ISO17025 (Ilac MRA))

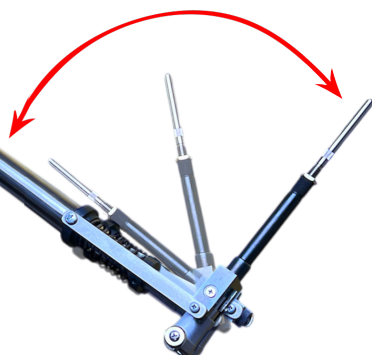


PRESET
FUNCTION


1µm



INSERT



MEASURE



CUSTOM RANGE AND DEPTH FOR REQUEST

Item No*	Range D	Reso- lution	Max A	Min H	MaxH	Accuracy
	mm	mm	mm	mm	mm	µm
139160800	70-160	0,001	20	D-30	150	±15
139160811					1000	±25
139160822					2000	±30
139160833					3000	±35
139250800	160-250				150	±15
139250811					1000	±25
139250822					2000	±30
139250833					3000	±35
139450800	250-450		150	±15		
139450811			1000	±25		
139450822			2000	±30		
139450833			3000	±35		
139550800	250-550		60	100+0,3*D	380	±25
139780800	480-780				400	±30
139910800	720-1020				400	±35



VIDEO

DELIVERY SET



OPTIONAL

141083000 USB HID DATA
TRANSFER CABLE 2.5M
DIRECT DATA TRANSFER, LIKE
A KEYBOARD

