


- Industry 4.0 adopted sub-micron Computerized thickness gauge with range up to 300mm and depth up to 800mm
- Functions: Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction, Resolution selecting, Connection status
- Memory manager: 2000 values, Folders system, Statistics mode, Memory data transfer
- Quick reading system (50 value/sec)
- **4 MODES DATA TRANSFER:** WIRELESS to MDS app (Windows, Android, iOS, MacOS); WIRELESS HID, WIRELESS HID+MAC, USB HID
- Calibration certificate included (ISO17025 (Ilac MRA))



CUSTOM RANGE AND DEPTH FOR REQUEST


Item No	Range	Reso- lution	Accu- racy	Depth	Contact points D	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	FW update	Recharge	Memory	WIRELESS	USB	MODBUS
	mm	mm	µm	mm	mm														
137001027	0-1	0.0001	±3	25	6,35	●	●	●	●	●	●	●	●	●	●	Folders / 2000 val	Long range / HID	USB HID / Update firmware	OPTION
137010127	0-10		±8	120	10	●	●	●	●	●	●	●	●	●	●				
137020127	0-20		±12	120		●	●	●	●	●	●	●	●	●					
137025207	0-25		±15	200		●	●	●	●	●	●	●	●	●					
137025407			±20	400		●	●	●	●	●	●	●	●	●					
137050307	0-50		±20	300		●	●	●	●	●	●	●	●	●					
137050407			±22	400		●	●	●	●	●	●	●	●	●					
137050607			±30	600		●	●	●	●	●	●	●	●	●					
137050807			±35	800		●	●	●	●	●	●	●	●	●					
137100407	0-100		±24	400		●	●	●	●	●	●	●	●	●					
137100607			±32	600		●	●	●	●	●	●	●	●	●					
137100807			±44	800		●	●	●	●	●	●	●	●	●					
137150407	0-150	±50	400	●	●	●	●	●	●	●	●	●							
137150807		±70	800	●	●	●	●	●	●	●	●	●							
137300407	150-300	±60	400	●	●	●	●	●	●	●	●	●							
137300807		±85	800	●	●	●	●	●	●	●	●	●							

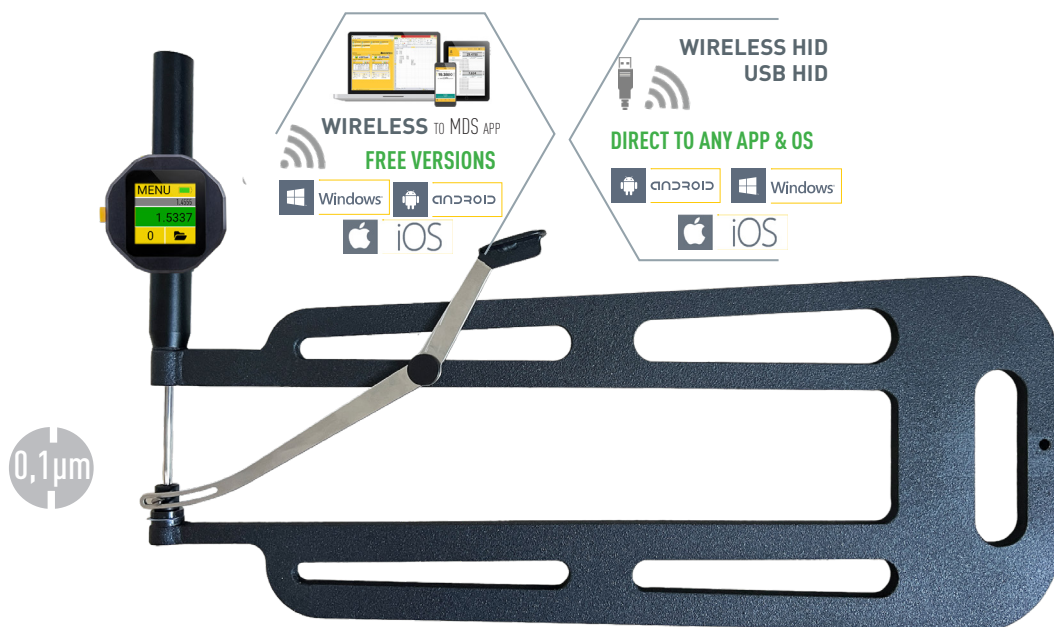

DOWNLOAD APP



COMPLECTATION

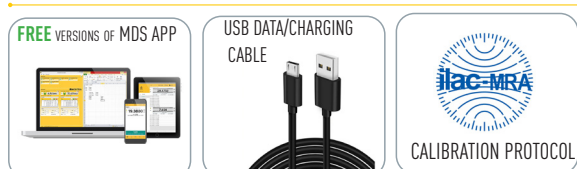

OPTIONAL

