

TABLET MULTIFUNCTIONAL **MICS**  
2.4" TOUCHSCREEN DISPLAY




0,1µm

**CONTACT Z-AXIS DataMet** INDICATOR



TABLET MULTIFUNCTIONAL **MICS**  
2.4" TOUCHSCREEN DISPLAY

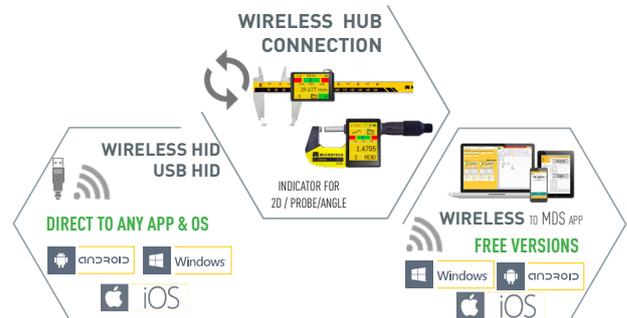

**NON CONTACT Z-AXIS RED LASER**



**CUSTOM RANGE FOR REQUEST**

- 2D Macro-Profile computerized stand
- CONTACT and NON-CONTACT RED LASER modifications
- Different ranges and modifications for customers request
- Computerized **MICS** indication system Modification with **Long range** Wireless, Wireless HID or USB HID data transfer to Windows, Android, iOS, macOS, Linux systems direct to any app.
- **Calibration** certificate included (ISO17025 (Ilac MRA))

## 2D MACRO-PROFILE DataMet STAND

| Item No  | Axis | Range  |      | Resolution |        | Accuracy |      | Weight<br>kg | Preset | Go/NoGo | Max/Min | Formula | Timer | Temp comp | Linear corr | Calibr date | Recharge | Memory         | WIRELESS   | USB       |
|----------|------|--------|------|------------|--------|----------|------|--------------|--------|---------|---------|---------|-------|-----------|-------------|-------------|----------|----------------|------------|-----------|
|          |      | X      | Z    | X          | Z      | X        | Z    |              |        |         |         |         |       |           |             |             |          |                |            |           |
|          |      | mm     | mm   | mm         | mm     | mm       | mm   |              |        |         |         |         |       |           |             |             |          |                |            |           |
| 27720900 | 2D   | 0-900  | 0-12 | 0,01       | 0.0001 | ±0,002   | 7.0  | •            | •      | •       | •       | •       | •     | •         | •           | •           | •        | Folders / 2000 | Long range | USB HID / |
| 27721800 | 2D   | 0-1800 | 0-12 | 0,01       |        | ±0,002   | 11.5 | •            | •      | •       | •       | •       | •     | •         | •           | •           | •        |                |            |           |
| 27722800 | 2D   | 0-2800 | 0-25 | 0,01       |        | ±0,004   | 20.5 | •            | •      | •       | •       | •       | •     | •         | •           | •           | •        |                |            |           |
| 27723800 | 2D   | 0-3800 | 0-50 | 0,01       |        | ±0,006   | 24.5 | •            | •      | •       | •       | •       | •     | •         | •           | •           | •        |                |            |           |

## 2D LASER MACRO-PROFILE DataMet STAND

| Item No  | Axis | Range  |      | Resolution |        | Accuracy |      | Weight<br>kg | Preset | Go/NoGo | Max/Min | Formula | Timer | Temp comp | Linear corr | Calibr date | Recharge           | Memory           | WIRELESS         | USB |
|----------|------|--------|------|------------|--------|----------|------|--------------|--------|---------|---------|---------|-------|-----------|-------------|-------------|--------------------|------------------|------------------|-----|
|          |      | X      | Z    | X          | Z      | X        | Z    |              |        |         |         |         |       |           |             |             |                    |                  |                  |     |
|          |      | mm     | mm   | mm         | mm     | mm       | mm   |              |        |         |         |         |       |           |             |             |                    |                  |                  |     |
| 27720907 | 2D   | 0-900  | 0-8  | 0,01       | 0.001  | ±0,030   | 7.0  | •            | •      | •       | •       | •       | •     | •         | •           | •           | Folders / 2000 val | Long range / HID | USB HID / Update |     |
| 27720908 | 2D   |        | 0-40 |            | 0.001  |          | 7.2  | •            | •      | •       | •       | •       | •     | •         |             |             |                    |                  |                  |     |
| 27721807 | 2D   | 0-1800 | 0-8  |            | 0.001  | ±0,060   | 11.5 | •            | •      | •       | •       | •       | •     | •         | •           | •           |                    |                  |                  |     |
| 27721808 | 2D   |        | 0-40 |            | 0.001  |          | 11.7 | •            | •      | •       | •       | •       | •     | •         |             |             |                    |                  |                  |     |
| 27722807 | 2D   | 0-2800 | 0-8  | 0.001      | ±0,100 | 20.5     | •    | •            | •      | •       | •       | •       | •     | •         | •           | •           |                    |                  |                  |     |
| 27722808 | 2D   |        | 0-40 | 0.001      |        | 20.7     | •    | •            | •      | •       | •       | •       | •     | •         |             |             |                    |                  |                  |     |
| 27723807 | 2D   | 0-3800 | 0-8  | 0.001      | ±0,160 | 24.5     | •    | •            | •      | •       | •       | •       | •     | •         | •           | •           |                    |                  |                  |     |
| 27723808 | 2D   |        | 0-40 | 0.001      |        | 25       | •    | •            | •      | •       | •       | •       | •     | •         |             |             |                    |                  |                  |     |



DataMet interface



CONNECTION possibilities



VIDEO



DOWNLOAD MDS app WINDOWS



DOWNLOAD MDS app iOS, MacOS



DOWNLOAD MDS app ANDROID



### DELIVERY SET



### OPTIONAL

