


- Pipe straightness control stand
- Different ranges and modifications for customers request
- Computerized **MICS** indication system Modification with **Long range** Wireless, Wireless HID or USB HID data transfer to Windows, Android, iOS, macOS, Linux systems direct to any app.
- **Calibration** certificate included (ISO17025 (Ilac MRA))

0,1 μm
 PAT.UA521681
 PAT.UA140992

CUSTOM RANGE FOR REQUEST

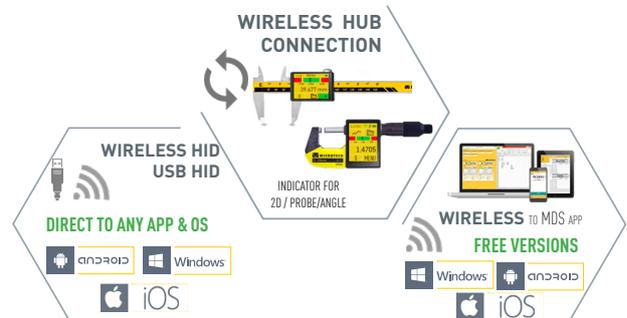

Item No	Axis	Range		Resolution	Accuracy		Weight	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Recharge	Memory	WIRELESS	USB			
		X	Z		X	Z																
		mm	mm		mm	mm																
27520900	2D	0-900	0-12	0,0001	±0,040	±0,002	10	•	•	•	•	•	•	•	•	•	•	•	•			
27521100		0-1100			±0,050	±0,002	12	•	•	•	•	•	•	•	•	•	•	•	•	•		
27521800		0-1800			±0,080	±0,002	15	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
27522100		0-2100			±0,090	±0,002	19	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
27522800		0-2800			±0,120	±0,002	35	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
27523100		0-3100			±0,130	±0,002	39	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
27523800		0-3800			±0,170	±0,002	51	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•



DELIVERY SET

FREE VERSIONS OF MDS APP

USB DATA/CHARGING CABLE

CALIBRATION PROTOCOL

OPTIONAL

DATA MET BUTTON

DATA MET FOOTSWITCH

MDS DISPLAY UNIT

MDS SOFTWARE

STANDARD MDS app