

- Industry 4.0 adopted DataMet indicator with 1.8" color Round Touchscreen computerized MICS system
- Measuring ranges up to 0-200mm (0-8")
- For using in precision bore gauges, thickness gauges, measuring stands and custom solutions.
- Functions: Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction, Resolution selecting, Connection status
- Memory manager: 50000 values, Memory data transfer
- 4 MODES DATA TRANSFER: WIRELESS to MDS app (Windows, Android, iOS, MacOS); WIRELESS HID, WIRELESS HID+MAC, USB HID
- Calibration certificate included (ISO17025 (Ilac MRA))



DataMet
ROUND 1.8"
TOUCHSCREEN DISPLAY

DATA MET FUNCTIONS




DIGITAL SCALE



COLOR GO / NOGO




MAX / MIN / RANGE




MEMORY 65500 values




TIMER




WIRELESS DATA




HID MODE



DISPLAY SETTINGS




FORMULA



RESOLUTION, mm/inch

Item No	Range		Resol.	Accu- racy	Hyste- resis	Force	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	FW update	Recharge	Memory	WIRELESS	USB	
	mm	inch																		mm
120136133	0-13	0-0,5"	0,001	±3	0,5	0,6-1	•	•	•	•	•	•	•	•	•	•	50000 val	Long range / HID	USB HID / Update	
120136252	0-25,4	0-1"		±4		0,7-1.2	•	•	•	•	•	•	•	•	•	•				•
120136302	0-30	0-1.2"		±4		0.7-1.2	•	•	•	•	•	•	•	•	•	•				•
120136502	0-50	0-2"		±5		1,2-2,2	•	•	•	•	•	•	•	•	•	•				•
120136902	0-100	0-4"		±6		3,2-5,2	•	•	•	•	•	•	•	•	•	•				•
120136952	0-150	0-6"		±8		3,2-5,2	•	•	•	•	•	•	•	•	•	•				•
120136962	0-200	0-8"		±10		3,2-5,2	•	•	•	•	•	•	•	•	•	•				•

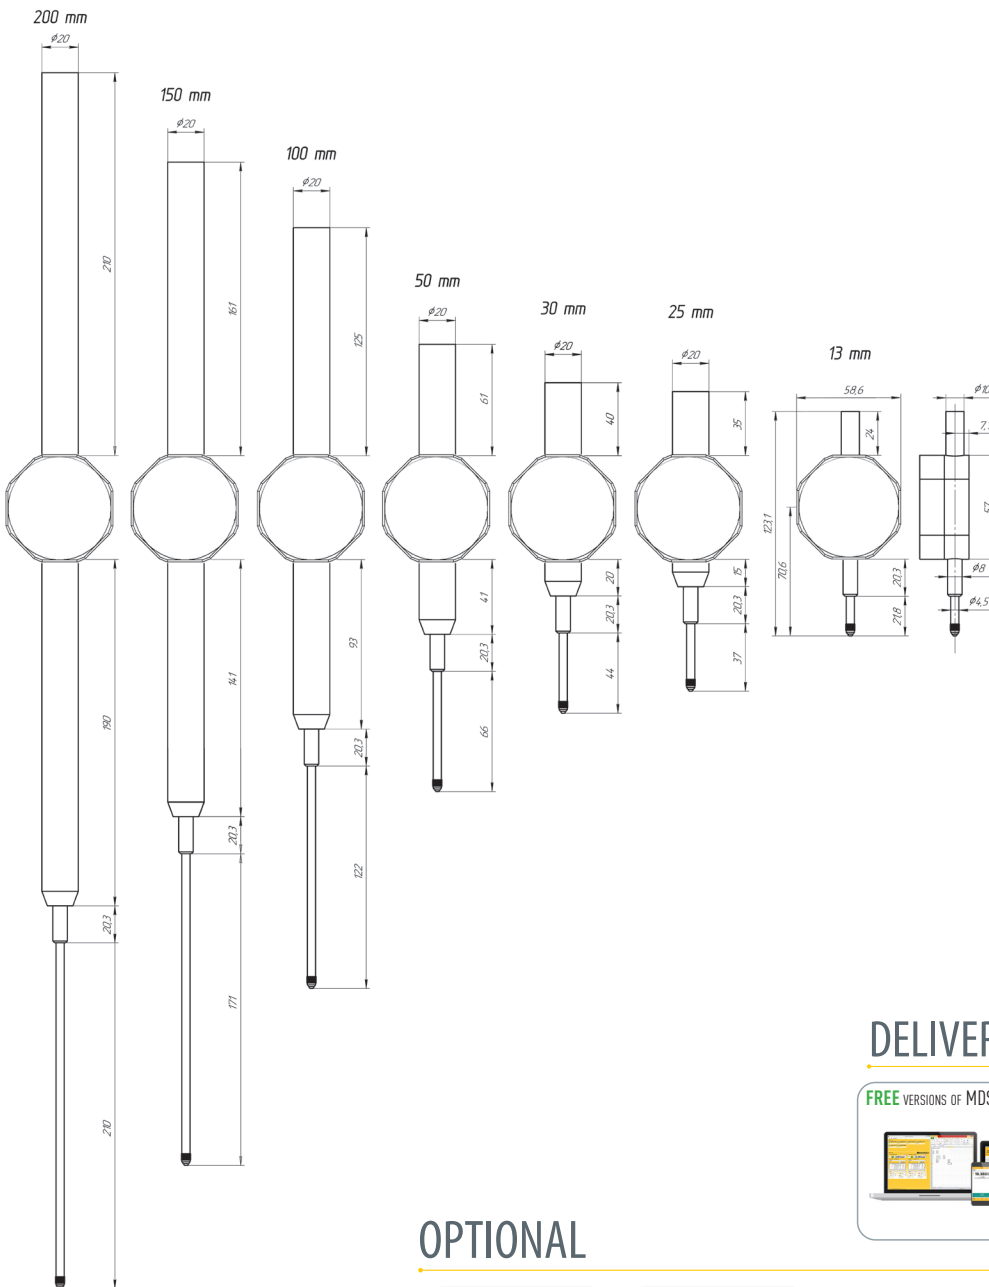

DOWNLOAD
MDS app WINDOWS

DOWNLOAD
MDS app iOS, MacOS

DOWNLOAD
MDS app ANDROID

DataMet
interface

CONNECTION
possibilities

DELIVERY SET

FREE VERSIONS OF MDS APP

CALIBRATION PROTOCOL

USB DATA/CHARGING CABLE

OPTIONAL

DATA MET BUTTON

DATA MET FOOTSWITCH

MDS DISPLAY UNIT

MDS SOFTWARE

STANDARD MDS app

STANDS