


- Industry 4.0 adopted LASER **DataMet** indicator with computerized MICS system (Hi-res 2.4" color Touchscreen display)
- LASER **DataMet** computerized indicator with 0.001mm resolution (adjust 0,001/0,01mm)
- Quick reading system up to 4 KHz
- IP67 Water-dust proof
- Clamping Ø 8-h6
- Functions: On-line Graphic, Analog scale, Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction
- Measuring HUB: Wireless MICROTECH instrument connection, Synchronization, 2D mode, 2D Graph, Probe mode, Compensation
- Memory manager: 2000 values, Folders system, Statistics mode, Memory data transfer
- **4 MODES DATA TRANSFER: WIRELESS** to MDS app (Windows, Android, iOS, MacOS); **WIRELESS HID, WIRELESS HID+MAC, USB HID**
- Calibration certificate included (ISO17025 (Ilac MRA))

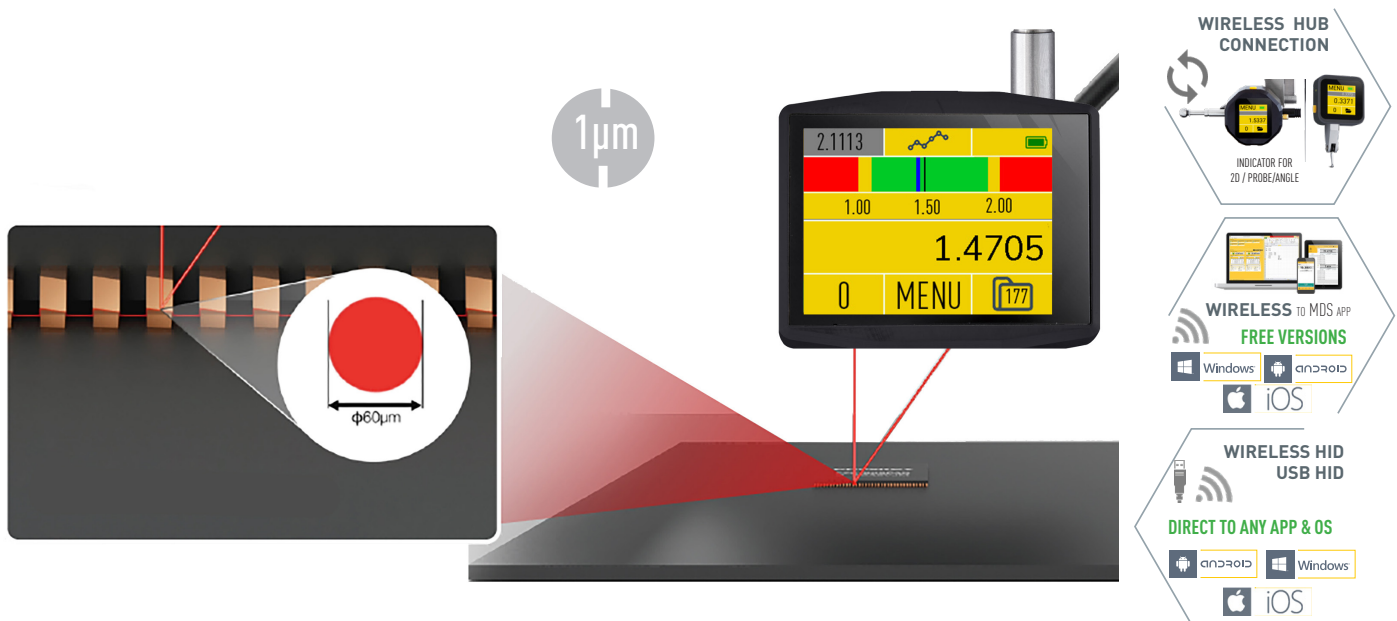

Item No	Range		Reso- lution	Accu- racy*	Clamping Diameter	Proof	2D connect	Measuring HUB	Graphic	Analog scale	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	FW update	Recharge	Memory	WIRELESS	USB
	mm	inch	mm	µm	mm																		
120177040	±4	±0.15"		±8			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
120177200	±20	±0.75"	0,001	±20	8-h6	IP67	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
120177600	±60	±2.25"		±60			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

*ACCURACY ON WELL ON MATTE OR NON-REFLECTIVE SURFACES (CERAMIC)


DELIVERY SET



OPTIONAL



- **MODBUS RTU** LASER indicator (OLED display), IP67 water-dust proof
- LASER **DataMet** computerized indicator with 0.001mm resolution (adjust 0,001/0,01mm)
- Clamping Ø 8-h6
- **MODBUS RTU** data output (RS-485, 4-wire, 5-24V, GND, A, B) for industrial connections
- Quick reading system up to 4 KHz
- Functions: On-line Graphic, Analog scale, Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction
- Measuring HUB: Wireless MICROTECH instrument connection, Synchronization, 2D mode, 2D Graph, Probe mode, Compensation
- Memory manager: 2000 values, Folders system, Statistics mode, Memory data transfer
- **4 MODES DATA TRANSFER**: WIRELESS to MDS app (Windows, Android, iOS, MacOS); WIRELESS HID, WIRELESS HID+MAC, USB HID
- Calibration certificate included (ISO17025 (Ilac MRA))

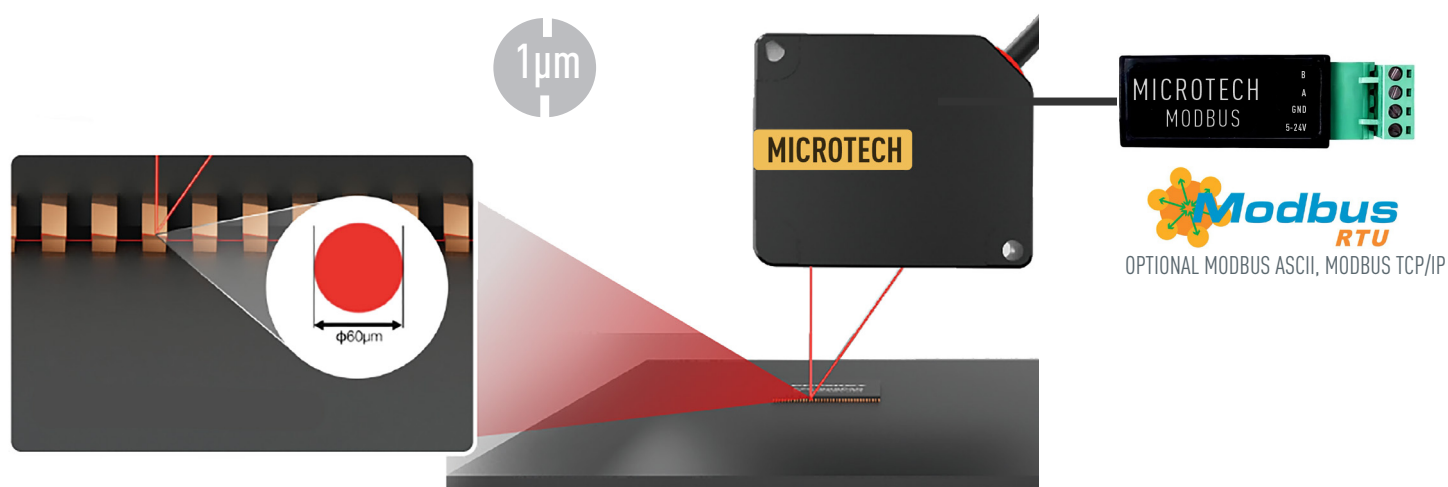

Item No	Range		Resolution	Accuracy*	Clamping Diameter	Proof	MODBUS RTU	MODBUS ASCII	MODBUS TCP/IP
	mm	inch		µm					
120177040M	±4	±0.15"	0,001	±8	8-h6	IP67	•	option	option
120177200M	±20	±0.75"		±20			•		
120177600M	±60	±2.25"		±60			•		

*ACCURACY ON WELL ON MATTE OR NON-REFLECTIVE SURFACES (CERAMIC)

DELIVERY SET



OPTIONAL

