



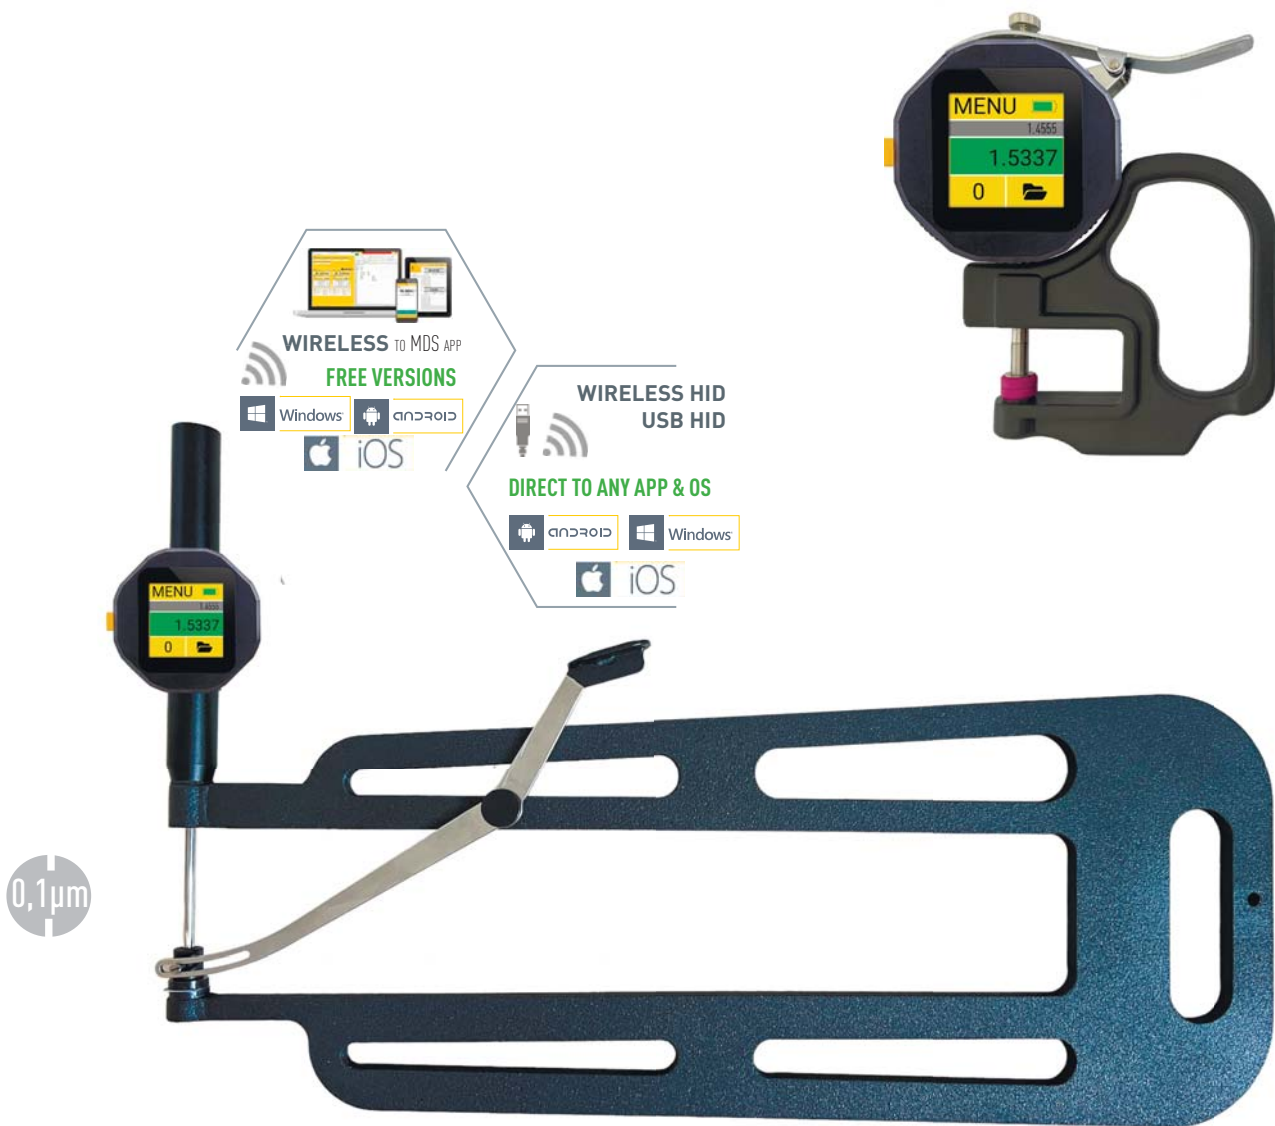

CUSTOM RANGE AND DEPTH FOR REQUEST

DATAmet FUNCTIONS

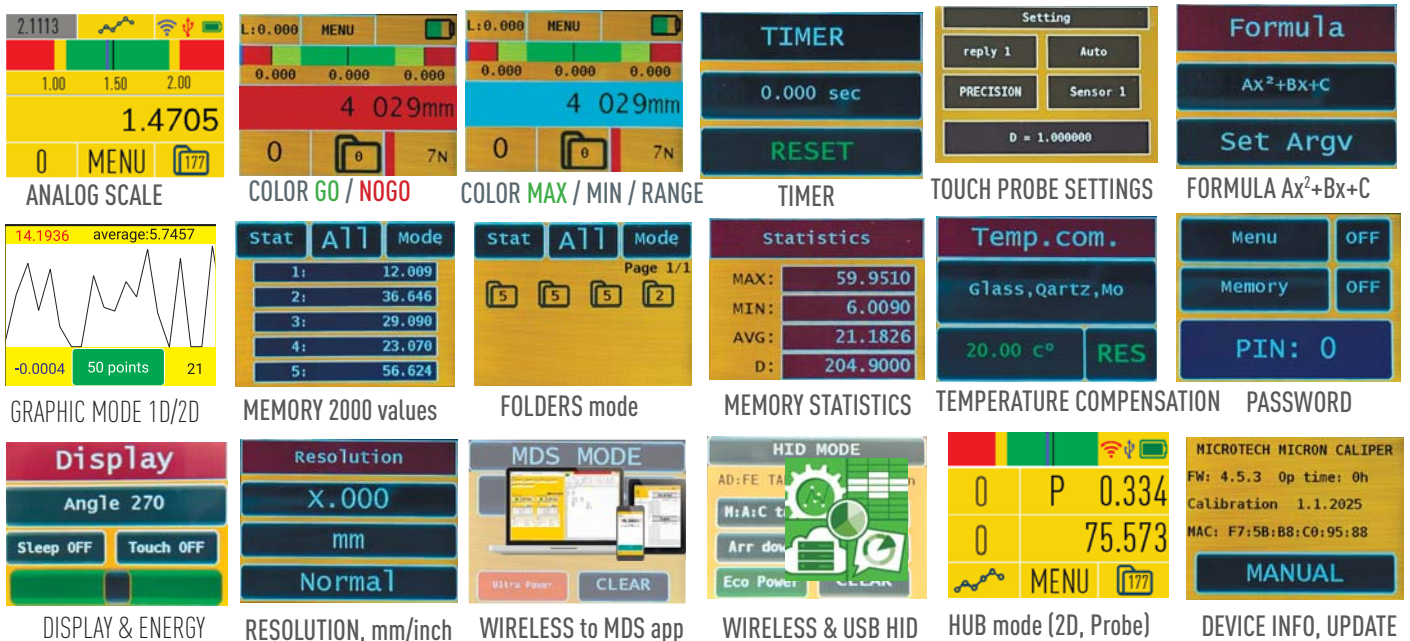


- Industry 4.0 adopted DataMet thickness gauge with range up to 300mm and depth up to 800mm
- Functions: Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction, Resolution selecting, Connection status
- Memory manager: 2000 values, Folders system, Statistics mode, Memory data transfer
- Quick reading system (50 value/sec)
- 4 MODES DATA TRANSFER: WIRELESS to MDS app (Windows, Android, iOS, MacOS); WIRELESS HID, WIRELESS HID+MAC, USB HID
- OPTIONAL MODBUS RTU data output (RS-485, 4-wire, 5-24V, GND, A, B) for industrial connections
- Calibration certificate included (ISO17025 (Ilac MRA))

Item No	Range	Reso- lution	Accu- racy	Depth	Contact points D	Lifting device	Force	Weight	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	FW update	Recharge	Memory	WIRELESS	USB	MODBUS RTU
	mm	mm	µm	mm	mm		N	kg														
137001027	0-1	0.0001	±3	25	6,35	●	0,5-0,7	0,26	●	●	●	●	●	●	●	●	●	●	Folders / 2000 val Long range / HID USB HID / Update firmware OPTION			
137010127	0-10		±8	120	10	●	0,7-1,3	0,34	●	●	●	●	●	●	●	●	●	●				
137020127	0-20		±12	120		●	1,2-1,8	0,38	●	●	●	●	●	●	●	●	●	●				
137030207	0-30		±15	200		●		0,66	●	●	●	●	●	●	●	●	●	●				
137030407			±20	400		●		1,5	●	●	●	●	●	●	●	●	●	●				
137050307	0-50		±20	300		●	1,8-2,3	1,5	●	●	●	●	●	●	●	●	●	●		●		
137050457			±22	450		●		3,3	●	●	●	●	●	●	●	●	●	●				
137050807			±35	800		●		4,8	●	●	●	●	●	●	●	●	●	●				
137100407	0-100		±24	400		●	2,5-3,3	3,8	●	●	●	●	●	●	●	●	●	●		●		
137100807			±44	800		●		5,4	●	●	●	●	●	●	●	●	●	●				
137150407	0-150		±50	400		●	2,9-4.1	8,5	●	●	●	●	●	●	●	●	●	●		●		
137150807			±70	800		●		10,8	●	●	●	●	●	●	●	●	●	●				
137300407	150-300		±60	400		●		11,2	●	●	●	●	●	●	●	●	●	●		●		
137300807			±85	800		●		14,6	●	●	●	●	●	●	●	●	●	●		●		



DELIVERY SET



OPTIONAL

