




- High quality **CertiMet** digital indicator with IP65 proof
- PRESET, mm/inch, HOLD function
- USB data transfer (with optional data cable 141083000)
- CR2032 3V battery
- **Calibration** certificate included (ISO17025 (Ilac MRA))

PRESET
FUNCTION
HOLD
FUNCTION



VIDEO

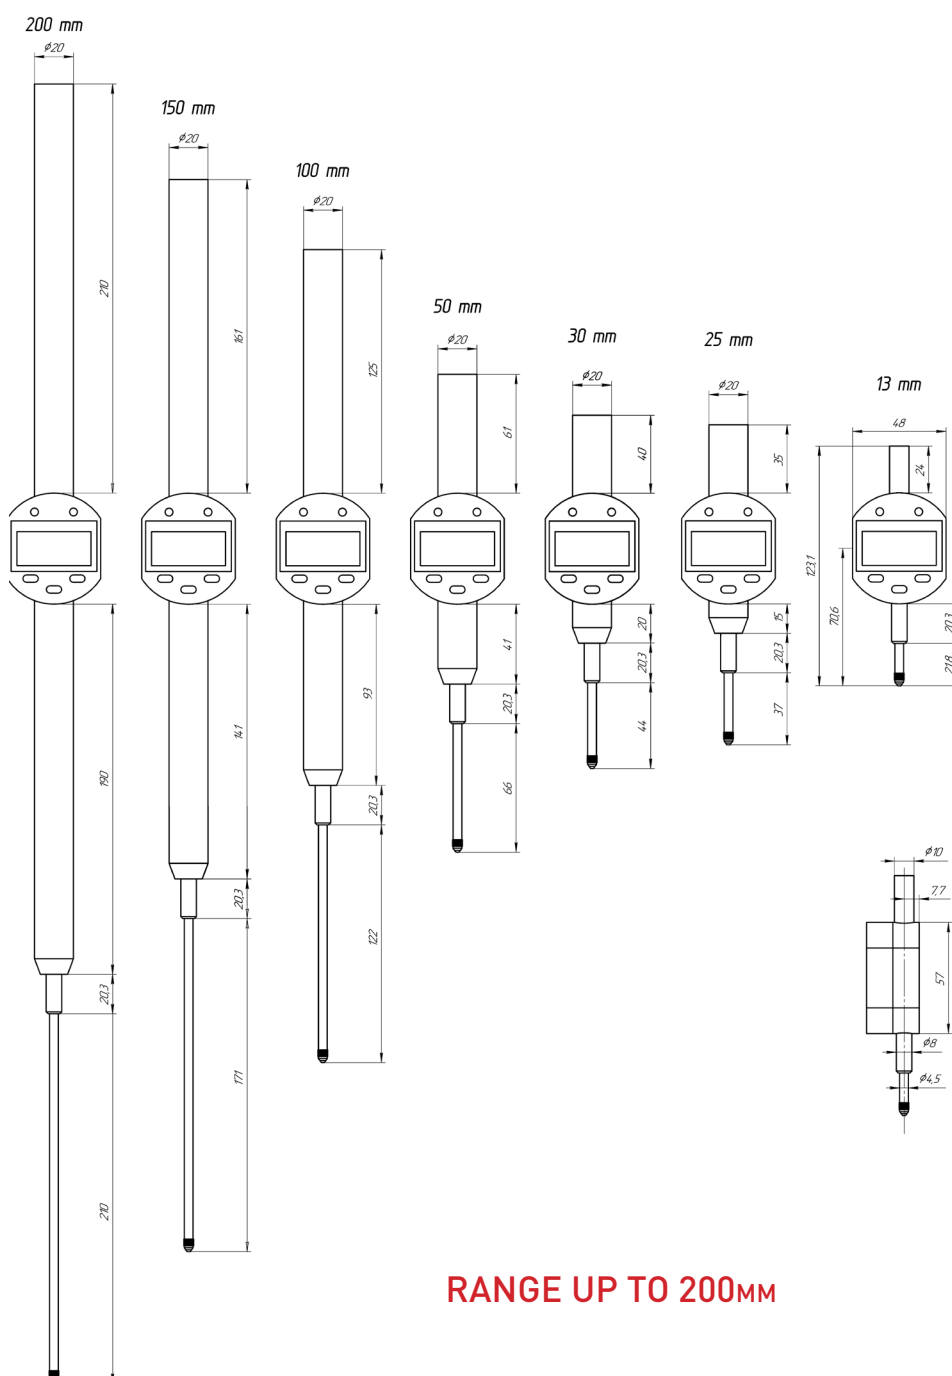

RANGE UP TO 200MM

Item No	Range		Resolution		Accuracy	Force	Proof	mm/inch	Preset	ABS	USB DATA
	mm	inch	mm	inch	µm	N					
120123133	0-13	0-0,5"	0,001	0.00005"	±10	0.6-1	IP65	•	•	•	•
120123134					±6			•	•	•	•
120125133					±4			•	•	•	•
120125134					±3			•	•	•	•
120125135					±2			•	•	•	•
120125251	0-25,4	0-1"	0,001	0.00005"	±10	0.7-1.2		•	•	•	•
120125252					±6			•	•	•	•
120125253					±4			•	•	•	•
120125301	0-30	0-1.2"	0,001	0.00005"	±10	0.7-1.2		•	•	•	•
120125303					±4			•	•	•	•
120125500	0-50	0-2"	0,001	0.00005"	±20	1.2-2.2		•	•	•	•
120125502					±7			•	•	•	•
120125503					±5			•	•	•	•
120125901	0-100	0-4"	0,001	0.00005"	±20	3-5		•	•	•	•
120125902					±12			•	•	•	•
120125904					±8			•	•	•	•
120125951	0-150	0-6"	0,001	0.00005"	±30			•	•	•	•
120125952					±20			•	•	•	•
120125954					±10			•	•	•	•
120125961	0-200	0-8"	0,001	0.00005"	±30			•	•	•	•
120125962					±20			•	•	•	•
120125964					±10			•	•	•	•



RANGE UP TO 200MM

DELIVERY SET



OPTIONAL

141083000 USB HID DATA
TRANSFER CABLE 2.5M
DIRECT DATA TRANSFER, LIKE A
KEYBOARD



STANDS

