




- Wide range **CertiMet** digital micrometer IP65 with range up to 3 m
- Digital micrometer head with IP65 proof
- Setting rods included
- **Calibration** certificate included (ISO17025 (Ilac MRA))

Item No	Range		Resol.	Accuracy	Micrometer head range	Weight	Setting rod
	mm	inch					
110174001	300-400	12-16"	0,001	±7	25	1,9	•
110175001	400-500	16-20"		±7		2,2	•
110176001	500-600	20-24"		±8		2,6	•
110177001	600-700	24-28"		±8		2,9	•
110178001	700-800	28-32"		±15		4,8	•
110179001	800-900	32-36"		±15		5,5	•
110171101	900-1000	36-40"		±15	50	6,7	•
110171201	1000-1200	40-48"		±18		9,2	•
110171401	1200-1400	48-56"		±20		11,0	•
110171601	1400-1600	56-64"		±25		13,3	•
110171801	1600-1800	64-72"		±30		16,2	•
110172001	1800-2000	72-80"		±35		19,5	•
110172201	2000-2200	80-88"		±40		25	•
110172401	2200-2400	88-96"		±45		27	•
110172601	2400-2600	96-104"		±50		28,5	•
110172801	2600-2800	104-112"		±55		30,5	•
110173101	2800-3000	112-120"		±60		33	•

DELIVERY SET

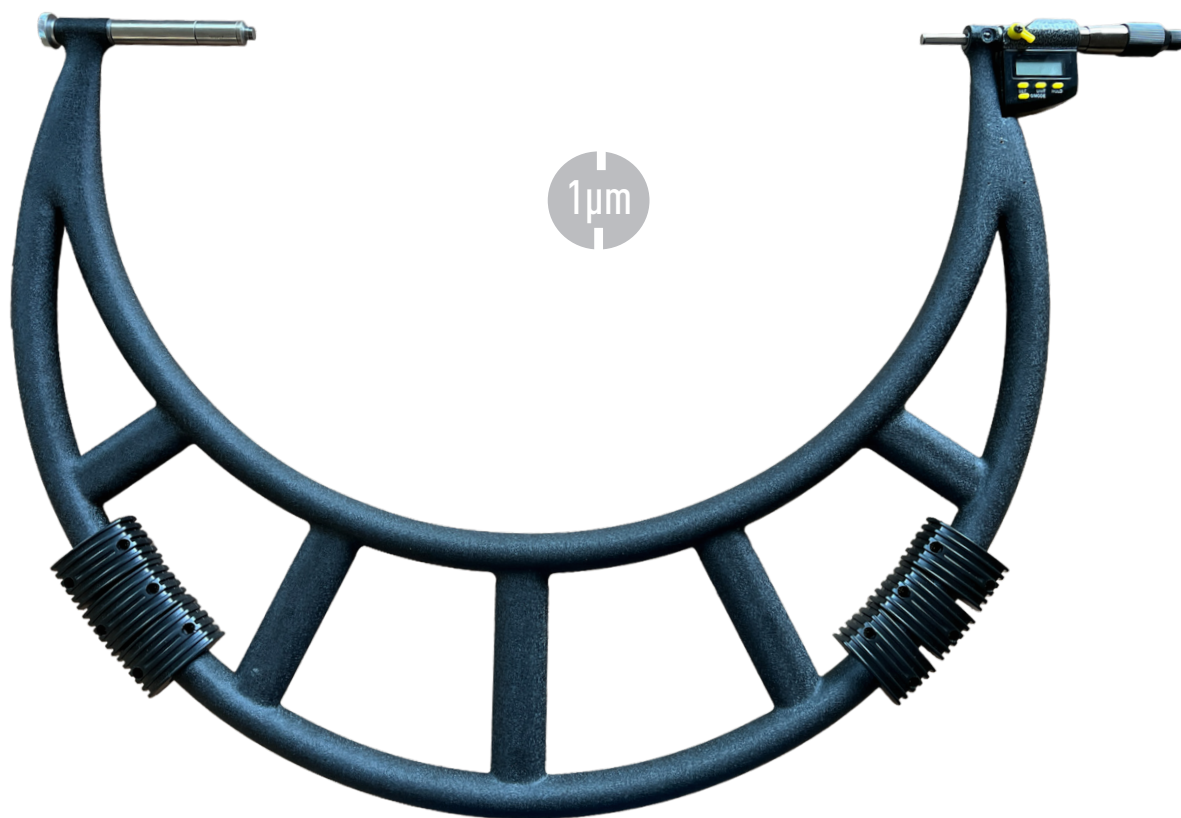