


- Industry 4.0 adopted E-Force caliper with computerized **MICS** system with 2.0" color Touchscreen (Patents US10184772, UA174949, UA126928)
- **LAB** caliper with **SWISS made reading system** Min resolution **0,2micron** (0,0002/0,001/0,01/0,1mm selection)
- **External ceramic tipped jaws non-magnetic, non-conductive and wear-resistant**
- **Functions:** Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction, Resolution select, Connection indication
- **Memory manager:** 2000 values, Folders system, Statistics mode, Memory data transfer
- **E-Force control module** with Force selection 1-20N, color indication, AUTO-Force mode, Force indication
- **4 MODES DATA TRANSFER:** **WIRELESS** to MDS app (Windows, Android, iOS, MacOS); **WIRELESS HID**, **WIRELESS HID+MAC**, **USB HID**
- **Calibration certificate** included (ISO17025 (Ilac MRA))




Item No	Range		Reso- lution	Accu- racy*	eForce	Jaws	Measuring HUB	Analog scale	Graphic	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr.	Calibr date	Recharge	Auto off	Password	Memory	Statistics	WIRELESS	USB HID	FW update	
	mm	inch																								mm
141088015AK	0-150	0-6"	0,0002	±4	1-20	40/16	•	•	•	•	•	•	•	•	•	•	•	•	•	•	1000 val	•	•	•	•	
141088020AK	0-200	0-8"		±6		50/17	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•	•
141088030AK	0-300	0-12"		±8		60/20	•	•	•	•	•	•	•	•	•	•	•	•	•	•		•	•	•	•	•

*Accuracy on external jaws. Internal jaws and Depth according ISO13385-1

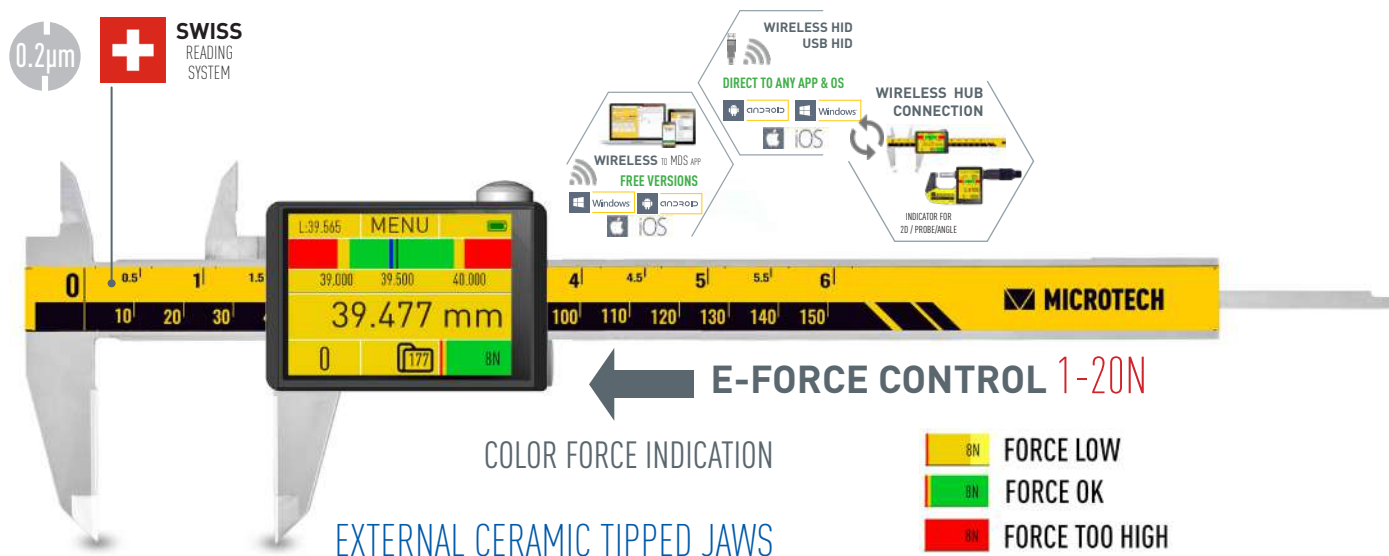

DELIVERY SET

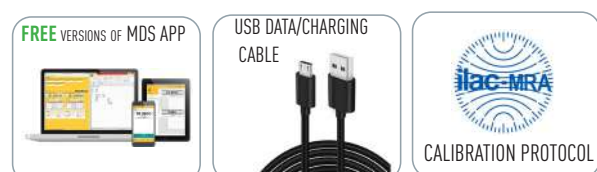

OPTIONAL

