




CUSTOM RANGE AND ANVILS FOR REQUEST

DATAmet FUNCTIONS

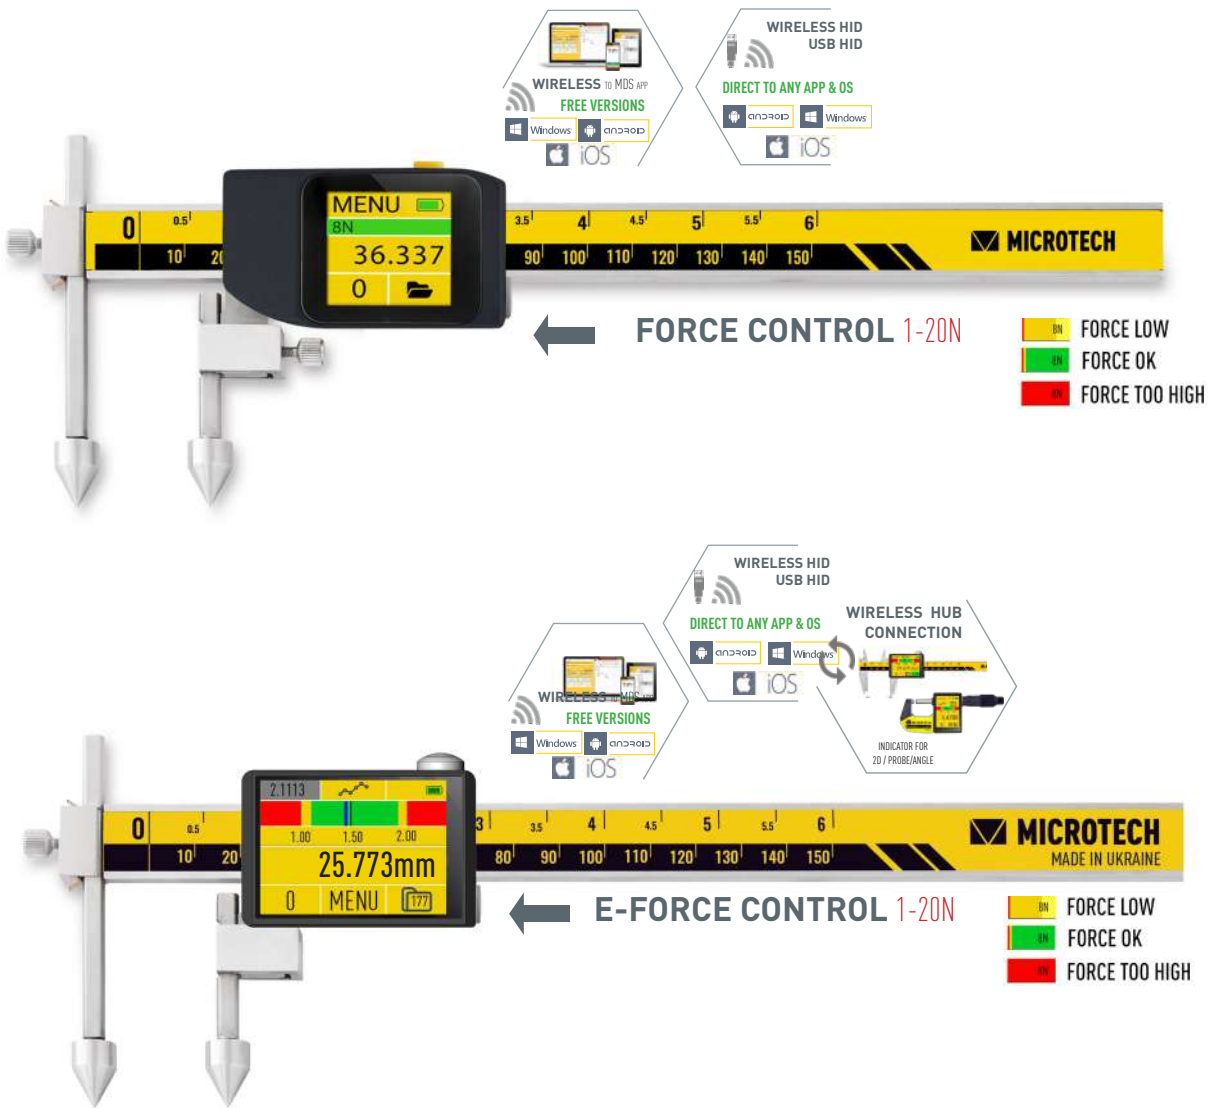

- **DataMet** Offset centerline caliper for hole center distance measurings
- Computerized **MICS** indication system with 0,005, 0.01 or 0,001mm resolution **SWISS made reading system**
- **E-Force** control module with Force selection 1-20N, color indication, AUTO-Force mode, Force indication
- **Functions:** Go/NoGo, Max/Min, Formula, Timer, Linear correction, Temperature correction, Resolution select, Connection indication
- **Memory manager:** 2000 values, Folders system, Statistics mode, Memory data transfer
- **4 MODES DATA TRANSFER:** **WIRELESS** to MDS app (Windows, Android, iOS, MacOS); **WIRELESS HID**, **WIRELESS HID+MAC**, **USB HID**
- **OPTIONAL MODBUS RTU** data output (RS-485, 4-wire, 5-24V, GND, A, B) for industrial connections
- **Calibration** certificate included (ISO17025 (Ilac MRA))

Item No	Range		Reso- lution	Accu- racy	Anvil D		Force	Protection	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	FW update	Recharge	Memory	WIRELESS	USB	MODBUS RTU			
					standard	option																			
	mm	inch	mm	µm	mm	mm	N																		
141730157	10-160	0.4-6.4"	0,005	±20	10	20, 35	1-20	IP54	•	•	•	•	•	•	•	•	•	•	Folders / 2000 val	Long range / HID	•	•			
141730207	10-210	0.4-8.4"		±25					•	•	•	•	•	•	•	•	•	•			•	•			
141270307	10-310	0.4-12.4"		±30					•	•	•	•	•	•	•	•	•	•			•	•			
141730517	20-520	0.8-20.4"	0,01	±40	20	35, 50			•	•	•	•	•	•	•	•	•	•			•	•	•	•	
141731017	20-1020	0.8-40.4"		±50					•	•	•	•	•	•	•	•	•	•			•	•	•	•	•
141731517	20-1520	0.8-40.4"		±60					•	•	•	•	•	•	•	•	•	•			•	•	•	•	•
141732017	20-2020	0.8-60.4"		±70					•	•	•	•	•	•	•	•	•	•			•	•	•	•	•
141733017	20-3020	0.8-80.4"																							
MICRON OFFSET CENTERLINE CALIPER																									
141730158	10-160	0.4-6.4"	0,001	±15	10	20, 35	1-20	IP54	•	•	•	•	•	•	•	•	•	•	Folders / 2000 val	Long range / HID	•	•			
141730208	10-210	0.4-8.4"		±20					•	•	•	•	•	•	•	•	•	•			•	•			
141270308	10-310	0.4-12.4"		±20					•	•	•	•	•	•	•	•	•	•			•	•			
141730518	20-520	0.8-20.4"		20	35, 50				•	•	•	•	•	•	•	•	•	•			•	•	•		
141731018	20-1020	0.8-40.4"							±30	•	•	•	•	•	•	•	•	•			•	•	•	•	•



DELIVERY SET



OPTIONAL

