


- Industry 4.0 adopted DataMet Snap gauge
- Anvils D 8 mm
- Supplying with computerized DataMet indicator with 0,1 micron resolution
- Functions: Go/NoGo, Max/Min, MultiPreset, Formula, Timer, Linear correction, Temperature correction
- Memory manager: 2000 values, Folders system, Statistics mode, Memory data transfer
- Quick reading system (50 value/sec)
- **4 MODES DATA TRANSFER:** WIRELESS to MDS app (Windows, Android, iOS, MacOS); WIRELESS HID, WIRELESS HID+MAC, USB HID
- Calibration certificate included (ISO17025 (Ilac MRA))



Item No	Range		Reso- lution	Accu- racy	Depth	Anvils type	Travel	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Recharge	Memory	WIRELESS	USB
	mm	inch	mm	µm	mm		mm												
115050507	0-50	0-2"	0,0001	±3	32	D 8mm	3	•	•	•	•	•	•	•	•	•	Folders / 2000 val	Long range / HID	USB HID
115051007	50-100	2-4"		±4	62			•	•	•	•	•	•	•	•	•			
115051507	100-150	4-6"		±4	85			•	•	•	•	•	•	•	•	•			
115052007	150-200	6-8"		±4	110			•	•	•	•	•	•	•	•	•			
115052507	200-250	8-10"		±6	110			•	•	•	•	•	•	•	•	•			
115053007	250-300	10-12"		±7	110			•	•	•	•	•	•	•	•	•			
115053507	300-350	12-14"		±8	110			•	•	•	•	•	•	•	•	•			
115054007	350-400	14-16"		±9	110			•	•	•	•	•	•	•	•	•			
115054507	400-450	16-18"		±10	110			•	•	•	•	•	•	•	•	•			
115055007	450-500	18-20"		±10	110			•	•	•	•	•	•	•	•	•			

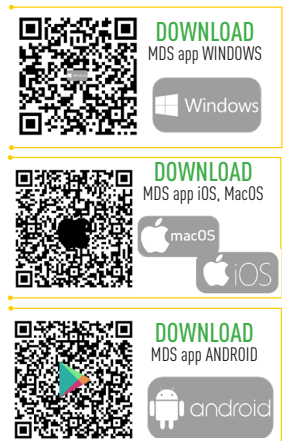

DELIVERY SET



OPTIONAL

