



- DataMet FILM Thickness gauge with 0.0001mm resolution
- **WIRELESS** data transfer **3 MODES DATA TRANSFER**: WIRELESS to MDS app (Windows, Android, iOS, MacOS); WIRELESS HID, WIRELESS HID+MAC
- MODIFICATION MODBUS RTU data output (RS-485, 4-wire, 5-24V, GND, A, B) for industrial connections
- Calibration certificate included (ISO17025 (Iac MRA))

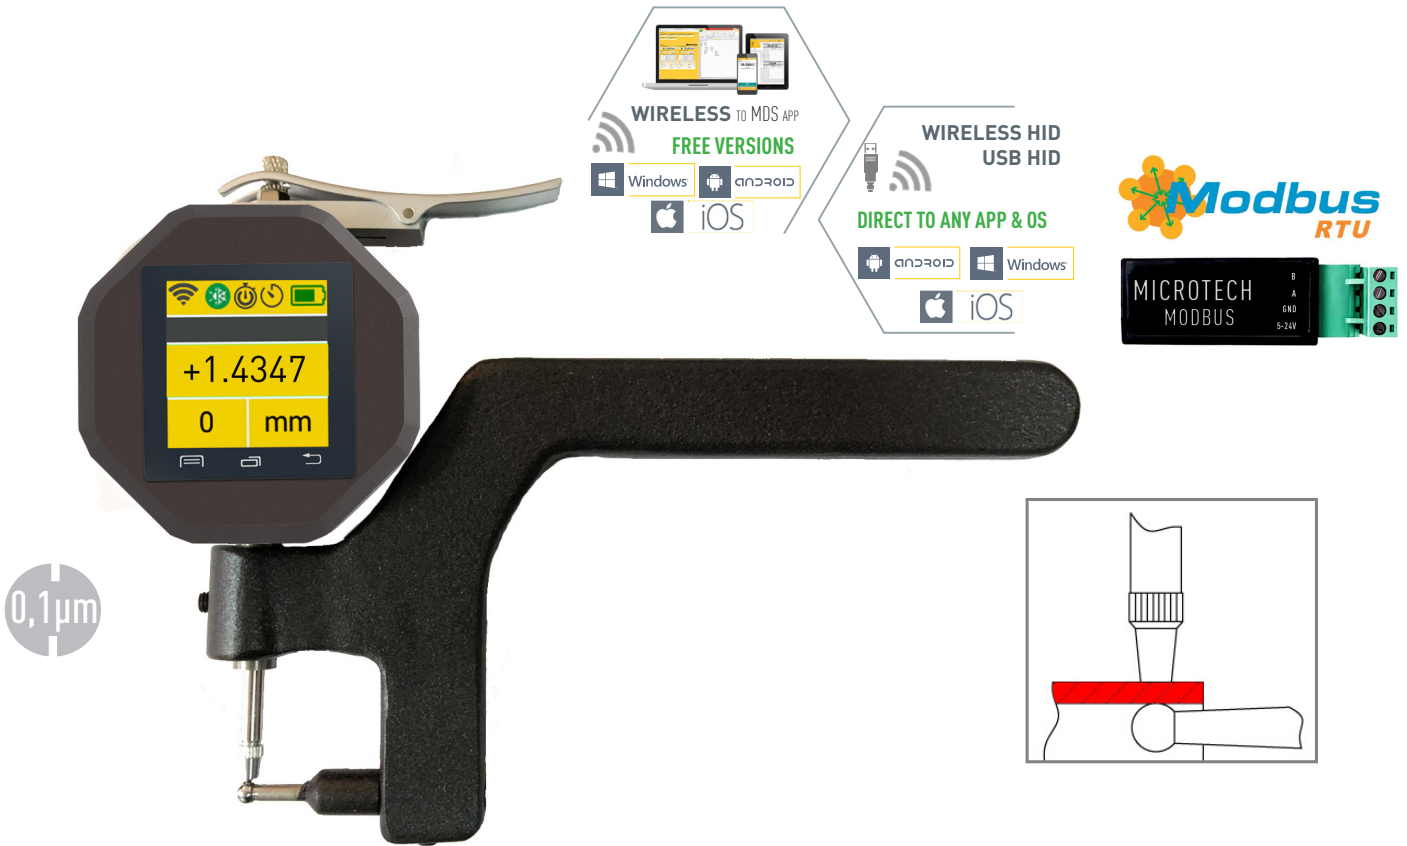

Item No	Range	Contact point	Resolution	Accuracy	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	Recharge	Memory	WIRELESS	USB	MODBUS RTU		
	mm	mm	mm	μm															
137011147	0-10	D 4	0,0001	±8	•	•	•	•	•	•	•	•	•	•	•	•	•		
137011147M					•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
137011107		D 6			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
13701110M					•	•	•	•	•	•	•	•	•	•	•	•	•	•	•

QR code for Windows app download

**DOWNLOAD**  
MDS app WINDOWS

QR code for iOS/MacOS app download

**DOWNLOAD**  
MDS app iOS, MacOS

QR code for Android app download

**DOWNLOAD**  
MDS app ANDROID

QR code for DataMet interface

**DataMet**  
interface

QR code for connection possibilities

**CONNECTION**  
possibilities

DELIVERY SET

- FREE VERSIONS OF MDS APP
- USB DATA/CHARGING CABLE
- CALIBRATION PROTOCOL (IAC-MRA)

OPTIONAL

- DataMet BUTTON
- DataMet FOOTSWITCH
- MDS DISPLAY UNIT
- MDS SOFTWARE (STANDARD MDS app)