


1µm
MODIFICATION
IP67
SWISS
ELECTRONICS



BUILT-IN MULTIMODE WIRELESS
DATA TRANSFER MODULE

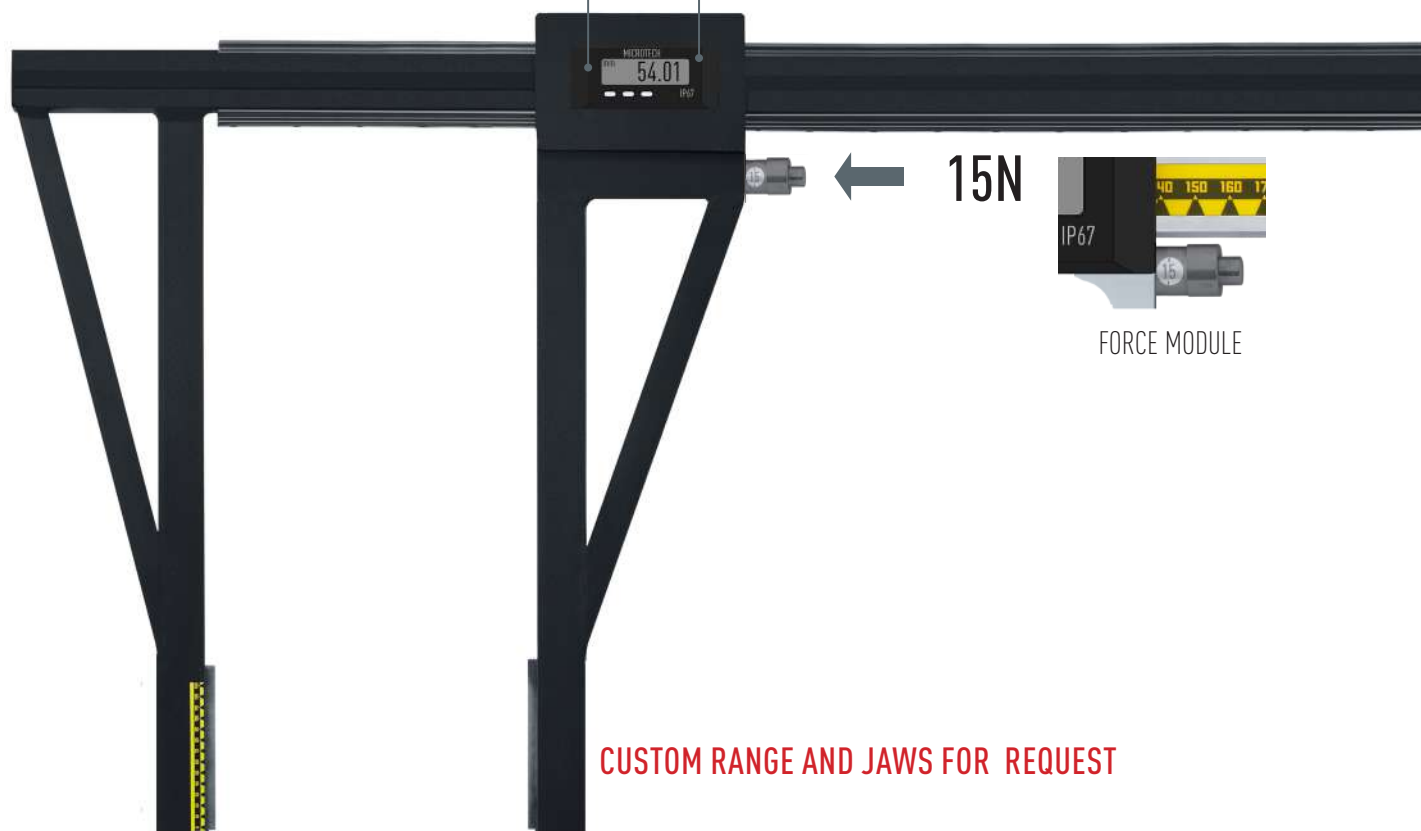

SwissMet IP67 FUNCTIONS

PrE	Unit	Hold
PRESET	mm/inch	HOLD

SLEEP (SIS) IP67 SWISS ELECTRONICS
Auto ON/OFF IP 67 (IEC60529) Swiss electronics

MDS APP
WIRELESS MDS app

HID
WIRELESS HID



- Aluminium construction with precision linear guides

- Extra Long jaw digital caliper with waterproof **IP67** Swiss electronics in Al case
- Jaw length up to 1000mm
- Aluminium construction with precision linear guides
- **3 MODES DATA TRANSFER:** **WIRELESS** to MDS app (Windows, Android, iOS, MacOS); **WIRELESS HID**, **WIRELESS HID+MAC**
- Calibration certificate included (ISO17025 (Ilac MRA))

MICRON WIRELESS FORCE **SwissMet** IP67 EXTRA LONG JAW DIGITAL CALIPER

Item No	Range		Resol.	Jaws	Accuracy	Weight	Protection	mm/inch	Preset	ABS	WIRELESS
	mm	inch	mm	mm	µm	kg					
142408447	0-800	0-32"	0,001	400	±25	3,9	IP67 Al case	•	•	•	•
142411447	0-1000	0-40'		400	±30	4,3		•	•	•	•
142411467				600	±40	4,7		•	•	•	•
142415447	0-1500	0-60'		400	±30	5,6		•	•	•	•
142415467				600	±40	6,1		•	•	•	•
142418447	0-1800	0-70"		400	±40	6.2		•	•	•	•
142418467				600	±60	6,6		•	•	•	•



WIRELESS FORCE **SwissMet** IP67 EXTRA LONG JAW DIGITAL CALIPER

Item No	Range		Resol.	Jaws	Accuracy	Weight	Protection	mm/inch	Preset	ABS	WIRELESS
	mm	inch	mm	mm	µm	kg					
142408446	0-800	0-32"	0,01	400	±30	3,9	IP67 Al case	•	•	•	•
142411446	0-1000	0-40'		400	±40	4,3		•	•	•	•
142411466				600	±50	4,7		•	•	•	•
142415446	0-1500	0-60'		400	±40	5,6		•	•	•	•
142415466				600	±50	6,1		•	•	•	•
142418446	0-1800	0-70"		400	±50	6,2		•	•	•	•
142418466				600	±60	6,6		•	•	•	•
142120146	0-2000	0-80"		400	±60	17,5		•	•	•	•
142120166				600	±85	18,0		•	•	•	•
142120106	0-2500	0-100"		1000	±120	19,0		•	•	•	•
142125146				400	±90	20,0		•	•	•	•
142125166	0-3000	0-120"		600	±105	20,5		•	•	•	•
142125106				1000	±140	21,5		•	•	•	•
142130146	0-3500	0-140"		400	±100	24,0		•	•	•	•
142130166				600	±110	24,5		•	•	•	•
142130106	0-3500	0-140"		1000	±160	25,5		•	•	•	•
142135146			400	±120	26,5	•		•	•	•	
142135166			600	±160	27,0	•		•	•	•	
142135106			1000	±240	28,0	•		•	•	•	



DELIVERY SET



OPTIONAL

