


- Long jaw digital caliper with waterproof **IP67** Swiss electronics with PRESET function
- High quality Swiss electronics with PRESET function and **IP67** protection (IEC60529) in Aluminium casing
- Max slider speed up to 2.5 m/s
- Big screen display (Digit 14mm) with refresh rate >10/s
- Stainless steel caliper with hand finished measuring surfaces (Ra<0.32µm)
- 3V battery (CR2032)
- **Calibration** certificate included (ISO17025 (Ilac MRA))

SWISS
READING SYSTEM
IP67 | 10 µm

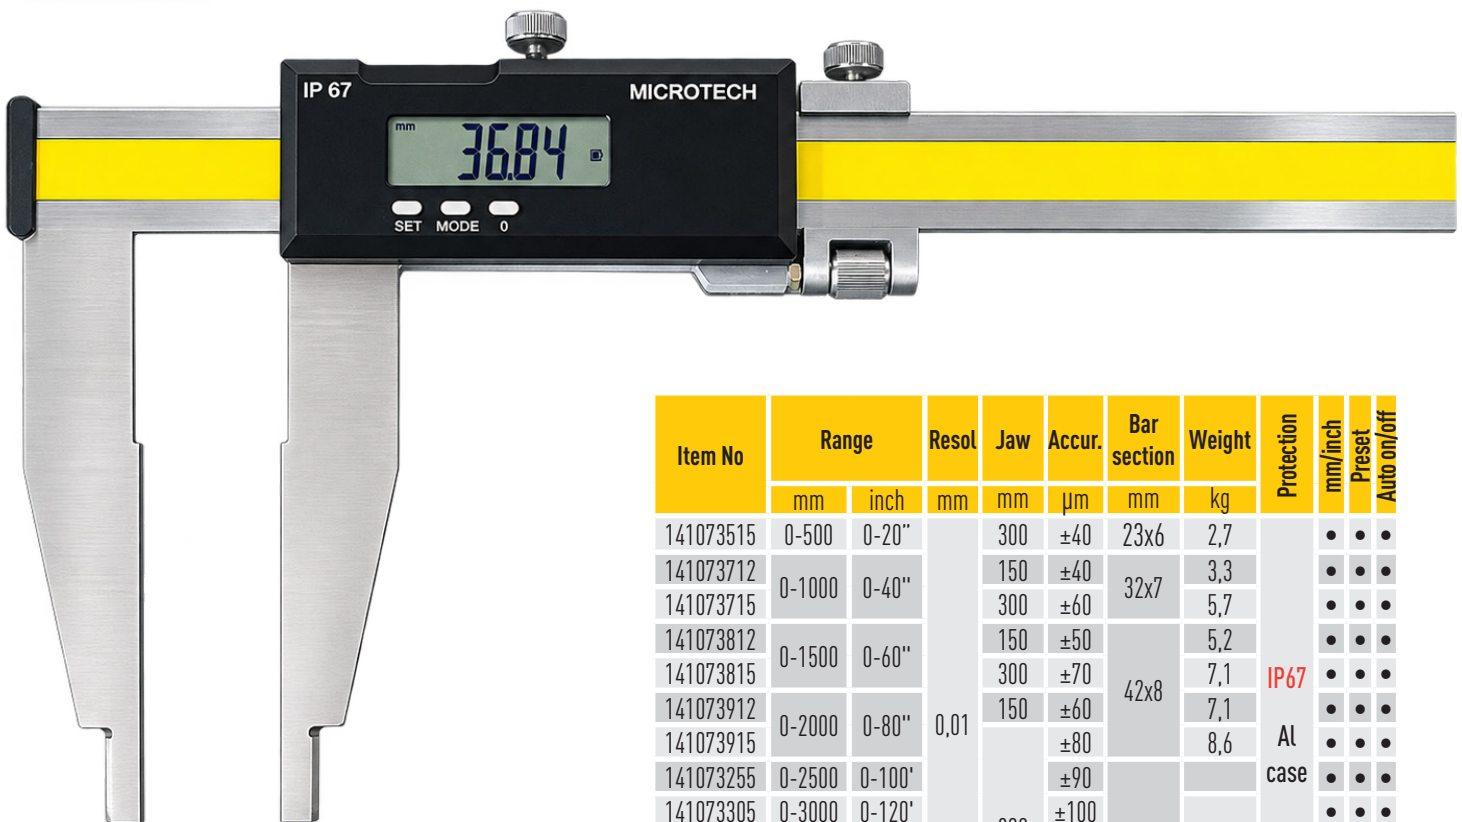

Item No	Range		Resol	Jaw	Accur.	Bar section	Weight	Protection	mm/inch	Preset	Auto on/off
	mm	inch									
141073515	0-500	0-20"	0,01	300	±40	23x6	2,7	IP67 Al case	•	•	•
141073712	0-1000	0-40"		150	±40	32x7	3,3		•	•	•
141073715				300	±60		5,7		•	•	•
141073812	0-1500	0-60"		150	±50	42x8	5,2		•	•	•
141073815				300	±70		7,1		•	•	•
141073912	0-2000	0-80"		150	±60		7,1		•	•	•
141073915				300	±80	8,6	•		•	•	
141073255	0-2500	0-100'			±90		•		•	•	
141073305	0-3000	0-120'			±100		•		•	•	
141073405	0-4000	0-160'			±130		•		•	•	
141073505	0-5000	0-200'			±160		•		•	•	
141073605	0-6000	0-240'			±200		•		•	•	

SwissMet IP67 FUNCTIONS

SWISS
READING SYSTEM
IP67 | 10 µm

PrE

PRESET

Unit

mm/inch

Hold

HOLD

23.45

SLEEP (SIS)

Big display-12mm Digit Auto ON/OFF



SwissMet
interface

CALIBRATION PROTOCOL

DELIVERY SET



VIDEO

- Long jaw **WIRELESS** digital caliper with waterproof **IP67** Swiss electronics with PRESET function
- High quality Swiss electronics (Digit 14mm), PRESET function and **IP67** protection (IEC60529) in Aluminium casing
- **MULTIMODE WIRELESS** data transfer: **WIRELESS** to MDS app (Windows, Android, iOS, MacOS) + **WIRELESS HID** (direct to any OS and app)
- Stainless steel caliper with hand finished measuring surfaces (Ra<0.32µm)
- Built-in **RECHARGEABLE** Li-Pol battery with MAGNETIC charging system
- Calibration certificate included (ISO17025 (Ilac MRA))







CONNECTION possibilities





SwissMet interface

OPTIONAL



← 15N

FORCE

EXTERNAL MECHANICAL

Item No	Range		Resol	Jaw	Accur.	Bar section	Weight	Protection	mm/inch	Preset	Auto on/off	WIRELESS
	mm	inch										
141073595	0-500	0-20"	0,001	300	±30	23x6	2,65	IP67	Al case	•	•	•
141073792	0-1000	0-40"		150	±35	32x7	3,32			•	•	•
141073795				300	±50		5,70			•	•	•
141073892	0-1500	0-60"		150	±50	42x8	5,2			•	•	•
141073895				300	±60		7,1			•	•	•
141073992	0-2000	0-80"		150	±60	53x8	7,1			•	•	•
141073995				±70	8,6		•			•	•	
141073265	0-2500	0-100'		300	±70					•	•	•
141073315	0-3000	0-120'			±80					•	•	•
141073415	0-4000	0-160'			±100					•	•	•
141073525	0-5000	0-200'			±120					•	•	•
141073625	0-6000	0-240'			±180					•	•	•

WIRELESS RECHARGEABLE SwissMet IP67 FUNCTIONS





PrE

PRESET

Unit

mm/inch

23.45

Big display-12mm Digit

SLEEP (SIS)

Auto ON/OFF



DELIVERY SET

FREE VERSIONS OF MDS APP



ILAC-MRA

CALIBRATION PROTOCOL



MAGNETIC CHARGING CABLE



OPTIONAL


DATAmet BUTTON



DATAmet FOOTSWITCH



FORCE MODULE 15N



MDS SOFTWARE

STANDARD MDS app

