

- L-shape rod bore gauge for measuring holes in ortagonal position to the gauge axis
- Digital MICRON indicator with PRESET, HOLD functions and optional USB data transfer
- **Calibration** certificate included (ISO17025 (Ilac MRA))



Item No	Range	Reso- lution	Accura- cy	Repea- tability	Depth rod		Tip travel	Weight	Preset	Hold
					main	second				
132064032	15-35	0,001	±4	±1	200	32	1,6	0,09	•	•
132064062	25-60		±4		275	44	2,3	0,27	•	•
132064152	50-150		±4		275	45	3,3	0,3	•	•
132064302	100-300		±5		375	70	3,5	0,52	•	•

COMPLECTATION



OPTIONAL

141083000 USB HID DATA
TRANSFER CABLE 2.5M
DIRECT DATA TRANSFER, LIKE A
KEYBOARD




- L-shape rod bore gauge for measuring holes in ortagonal position to the gauge axis
- Multifucntional computerized **MICS** indication system with 0.1 micron resolution.
- **4 MODES DATA TRANSFER:** WIRELESS to MDS app (Windows, Android, iOS, MacOS); WIRELESS HID, WIRELESS HID+MAC, USB HID
- Calibration certificate included (ISO17025 (Ilac MRA))



0,1µm

Item No	Range	Reso- lution	COMPUTERIZED																			
			Accur.	Repea- tability	Depth rod		Tip travel	Weight	Preset	Go/NoGo	Max/Min	Formula	Timer	Temp comp	Linear corr	Calibr date	FW update	Recharge	Memory	WIRELESS	USB	
					main	second																
	mm	mm	µm	µm	mm	mm	mm	kg														
132064038	15-35	0,0001	±3	±1	200	32	1,6	0,09	•	•	•	•	•	•	•	•	•	•	•	•	•	
132064068	25-60		±3		275	44	2,3	0,27	•	•	•	•	•	•	•	•	•	•	•	•	•	•
132064158	50-150		±3		275	45	3,3	0,3	•	•	•	•	•	•	•	•	•	•	•	•	•	•
132064308	100-300		±3		375	70	3,5	0,52	•	•	•	•	•	•	•	•	•	•	•	•	•	•

COMPLECTATION

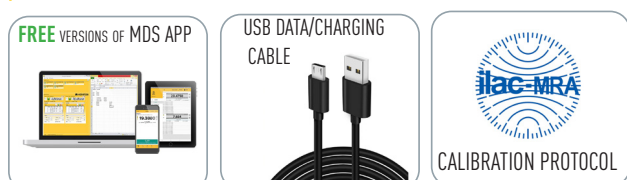

OPTIONAL

